


# Feeder Storage Cabinet 1% internal humidity Patented product

**Stores feeders with tape reels with no need to remove the reel from the feeder.**

- Applications**
- (1) Feeder storage for IC packages with tape reels
  - (2) Feeder storage for LEDs with tape reels
  - (3) Feeder storage for chips with tape reels


The feeder rack runs on sliding rails, making it easy to load and remove feeders. Capable of accommodating feeders with integrated tapes as well as those with separate tapes. Complies with the IPC/JEDEC J-STD-033C control standard for IC packages. Compatible with all moulder manufacturers, even those that use different feeder loading methods.

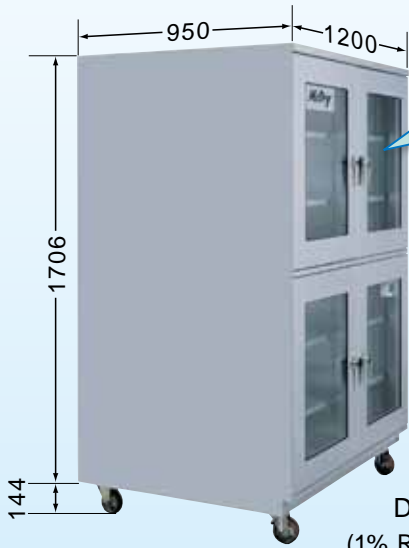


**DXU-1002-L**  
(1% RH) (900 mm deep)

\*Slide rail system optional.

Model	DXU-1002-L
Humidity regulator	Automatic dial regulator
External dimensions	1200W × 1000D × 1850H (mm)
Internal dimensions	1150W × 900D × 1700H (mm)
Capacity	Approx. 1600
Drying unit	US-5000F × 2
Material	Steel with conductive coating (color: silver)
Doors (magnetic)	4-door with glass panels
Weight	250 kg
Power supply	AC 100 V (50/60 Hz)
Power consumption	56 W/h (MAX 700 W)
Accessories	5 shelves, locks, humidity meter, casters (with stopper), ground terminal

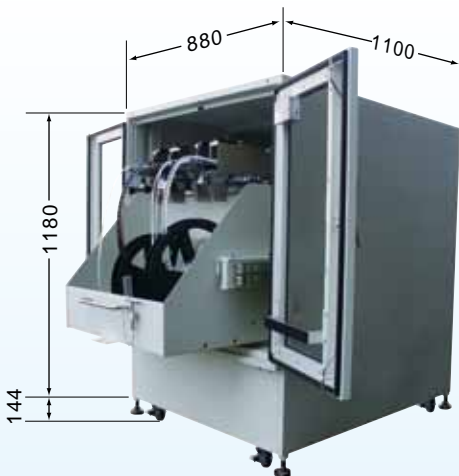

**DXU-580SF(1%RH)**

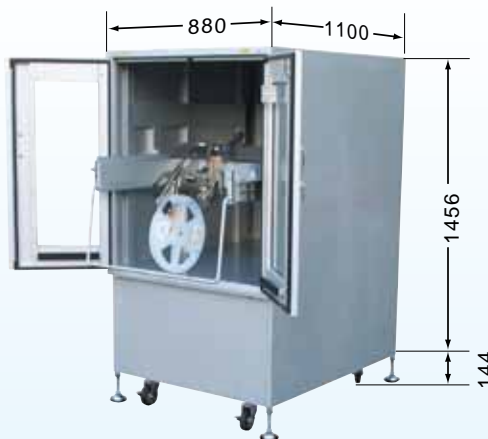

**DXU-580AF(1%RH)**



**DXU-400HF(1%RH)**

Model	DXU-580SF	DXU-580AF	DXU-400HF
External dimensions	800W × 1200D × 1324H (mm)	880W × 1200D × 1600H (mm)	650W × 600D × 1380H (mm)
Internal dimensions	830W × 1100D × 790H (mm)	830W × 1100D × 955H (mm)	620W × 550D × 1200H (mm)
Capacity	Approx. 900	Approx. 932	Approx. 400
Drying unit	US-5000F × 2		US-5000F
Material	Steel with conductive coating (color: silver)		
Doors (magnetic)	2-door with glass panels		1-door with glass panels
Weight	200 kg	240 kg	110 kg
Power supply	AC 100 V (50/60 Hz)		
Power consumption	56 W/h (MAX 700 W)		28 W/h (MAX 350 W)
Accessories	Locks, humidity meter, casters (with stopper), ground terminal		Locks, humidity meter, casters (with stopper), ground terminal